


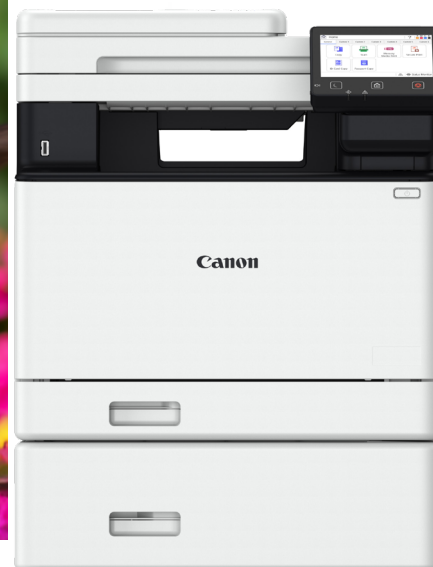

imageFORCE C1333F shown with optional cassette.

SPECIFICATIONS

Main Unit

Technology/Type	C1333F: Color A4 Laser Multifunctional C1333P: Color A4 Laser Printer
Core Functions	C1333F: Print, Copy, Scan, Send and Fax C1333P: Print
Control Panel	5" TFT LCD WVGA Color Touch panel
Memory	1.0 GB RAM
Processor	Single-Core 1.2GHz
Interface Connections	NETWORK Standard: 1000Base-T/100Base-T/10-Base-T, Wireless LAN (IEEE 802.11 b/g/n) OTHERS Standard: USB 2.0 (Host) x2, USB 2.0 (Device) x1
Paper Sources (Letter, 20 lb. Bond)	Standard: 250-Sheet Paper Cassette, 50-Sheet Multi-Purpose Tray Optional: 550-Sheet Paper Cassettes (PAPER FEEDER PF-K1)
Paper Capacity (Letter, 20 lb. Bond)	Standard: 250 Sheets Maximum: 850 Sheets
Output Capacity (Letter, 20 lb. Bond)	Standard: 75 Sheets
Supported Media Types	Cassettes: Thin, Plain, Thick, Color, Recycled, Coated, Label, Pre-punched, Letterhead, Postcard, Envelope Multi-Purpose Tray: Thin, Plain, Thick, Color, Recycled, Coated, Label, Pre-punched, Letterhead, Postcard, Envelope
Supported Media Sizes	Cassettes: Letter, Legal, Statement, Executive, Government Letter, Government Legal, Custom size (3-7/8" x 5-7/8" to 8-1/2" x 14") Multi-Purpose Tray: Letter, Legal, Statement, Executive, Government Letter, Government Legal, Index Card, Envelopes [No. 10 (COM10), Monarch, ISO-C5, DL], Custom Size (3" x 5" to 8-1/2" x 14")
Supported Media Weights	Cassettes: 16 lb. Bond to 74.0 lb. Cover (60 to 200 gsm) Multi-Purpose Tray: 16 lb. Bond to 74.0 lb. Cover (60 to 200 gsm) Duplex: 16 lb. Bond to 74 lb. Cover (60 to 200 gsm)

Warm-up Time	From Power On: 14 Seconds or Less ¹ From Sleep Mode: 5.3 Seconds or Less
Dimensions (W x D x H)	C1333F: 16-3/4" x 18-1/8" x 17" (425 x 461 x 430 mm) C1333P: 16-3/4" x 16-7/8" x 15" (425 x 427 x 380 mm)
Installation Space (W x D)	C1333F: Fully Configured: 16-3/4" x 36-1/8" (425 x 917 mm) (Cassette and Back Door Opened) C1333P: 16-3/4" x 36-1/8" (425 x 917 mm) (Cassette and Back Door Opened)
Weight	C1333F: Standard: Approx. 48.5 lb. (22.0 kg) ² C1333P: Standard: Approx. 35.5 lb. (16.1 kg) ²
Print Specifications	
Print Speed (Color)	Up to 35 ppm (Letter) ³
First-Print-Out Time (Letter, Color/BW)	Approx. 7 Seconds
Print Resolution (dpi)	Up to 1200 x 1200 (equivalent)
Standard Page Description Languages	Standard: UFR II, PCL6, PCL5, Adobe® PostScript®3™
Direct Print Supported File Types	Available from USB Memory (TIFF, JPEG, PDF)
Printing from Mobile and Cloud	A range of software solutions (Apple AirPrint, Canon PRINT, Mopria, and uniFLOW Online, Universal Print) are available to provide printing from mobile devices and services ⁴ depending on your requirements. Please contact your sales representative for further information.
Operating System Standard Printing	Android/Windows® 10/Windows® 11/Chrome OS/macOS (11.2.2)/iOS/iPadOS
Print Feature	Secure Watermark, Header/Footer, Page Layout, Two-Sided Printing, Mixed Paper Sizes/Orientations, Toner Reduction, Poster Printing, Print Date

SPECIFICATIONS CONTINUED

imageFORCE C1333F/C1333P

Fonts	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Barcode fonts ⁵ PS fonts: 136 Roman
Operating System	UFRIL: Windows® 10/11, Server 2016/Server 2019/Server 2022/Server 2025 MAC OS (10.15 or later) PCL: Windows® 10/11, Server 2016/Server 2019/Server 2022/Server 2025 MAC OS (10.15 or later) PS: Windows® 10/11, Server 2016/Server 2019/Server 2022/Server 2025 MAC OS (10.15 or later) PPD: Windows® 10/11, MAC OS X (10.15 or later)
Copy Specifications⁶	
Copy Speed	Up to 35 ppm (Letter)
First-Copy-Out Time (Letter, Color/BW)	Approx. 8.1 seconds or Less
Copy resolution (dpi)	600 x 600
Multiple Copies	Up to 999 Copies
Magnification	Variable Zoom: 25% - 400% (1% Increments)
Copy Features	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Two-Sided Original, Sort, N on 1, Different Size Originals, Sharpness, Erase Frame, Copy ID Card, Copy Passport, Color Mode, Reserved Copy
Scan Specifications⁶	
Type	Single-Pass Duplexing Automatic Document Feeder
Document Feeder Paper Capacity	Up to 50 Sheets (20 lb. Bond)
Document Feeder Supported Media Sizes	Sheet Media Size: Legal, Letter, Statement, Custom size (11-7/8" x 3-3/8" to 8-1/2" x 14")
Document Feeder Media Weights	Single and Double-Sided Scanning: 13.3 lb. Bond to 27.9 lb. Bond (50 to 105 gsm)
Platen Scanning Size	Up to 8-1/2" x 11-3/4"
Pull Scan Specifications	ScanGear MF For both TWAIN and WIA Windows 10/11, macOS (10.15 or later)
Scan Resolution (dpi)	Up to 600 x 600
Scan Method	Push Scan, Pull Scan, Scan to Network, Scan to memory media (USB Memory Key), Scan to cloud-based services (Optional uniFLOW Online)
Scan Speed (Letter)	Copy (300 x 600 dpi): Single-Sided Scanning (BW): 40 ipm Single-Sided Scanning (CL): 20 ipm Double-Sided Scanning (BW): 80 ipm Double-Sided Scanning (CL): 40 ipm Send (300 x 300 dpi): Single-Sided Scanning (BW): 50 ipm Single-Sided Scanning (CL): 40 ipm Double-Sided Scanning (BW): 100 ipm Double-Sided Scanning (CL): 80 ipm
Memory Media	Standard: USB Memory

Platen Acceptable Originals	Sheet, Book
Send Specifications⁶	
Destination	E-mail/Internet FAX (SMTP), SMB, FTP
Address Book	LDAP (50)/Local (300)/Speed dial (281)
Send Resolution (dpi)	192 x 204 (I-FAX) 300 x 300 (email/SMB/FTP)
Communication Protocol	File: FTP (TCP/IP), SMB3.0 (TCP/IP) Email/iFax: SMTP (Send), POP3 (Receive)
File Format	Standard: TIFF, JPEG7, PDF (Compact, Searchable, PDF/A-1b) Optional: PDF (Encrypted, Digital Signature)
Send Features	Original Type Selection, Two-Sided Original, Different-Size Originals, Density Adjustment, Sharpness, Preview, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Originals
Fax Specifications⁶	
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (dpi)	400 x 400 (Ultrafine), 200 x 400 (Superfine), 200 x 200 (Fine/ Photo), 200 x 100 (Normal)
Sending/Receiving Size	Sending: Statement to LGL Receiving: Statement, LTR and LGL
FAX Memory	Up to 512 Pages
Speed Dials	Max. 281
Group Dials/Destinations	Max. 299 Dials
Sequential Broadcast	Max. 310 Addresses
Memory Backup	Yes
Fax Features	Sender's Name (TTI), Direct Send, Preview, TX Report, Sequential Broadcasting
Security Specifications	
Authentication and Access Control	Department ID Authentication (Department ID and PIN Login, Function level Login) uniFLOW Online ⁸ (PIN Login, Card Login, Card and PIN Login)
Document Security	C1333F: Print Security (Secure Print, Encrypted Secure Print, uniFLOW Secure Print ⁸), Scan Security ⁹ (Encrypted PDF, Device Signature PDF/XPS), Send Data Security (Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History) C1333P: Print Security (Secure Print, Encrypted Secure Print, uniFLOW Secure Print ⁸)

SPECIFICATIONS CONTINUED

imageFORCE C1333F/C1333P

Network Security	C1333F: TLS 1.3, IPsec, IEEE802.1X authentication, SNMPv3, Firewall Functionality (IP/MAC Address Filtering), Enabling/Disabling (Network Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, WPA3 Support (Wi-Fi) C1333P: TLS 1.3, IPsec, IEEE802.1X authentication, Firewall Functionality (IP/MAC Address Filtering), Enabling/Disabling (Network Applications, Remote UI, USB Interface), USB Port separation from LAN, SNMPv3, WPA3 Support (Wi-Fi)
Device Security	Job Log Conceal Function, Protecting MFP Software Integrity, Checking MFP Software Integrity at Startup, Verify System at Startup (NIST SP800-193: Protection) ¹⁰ , Checking Software Integrity & Platform Firmware Resiliency: Automatic System Recovery (NIST SP800-193: Recovery)
Device Management and Auditing	Administrator Password, Digital Certificate and key Management, Cooperating with External Security Audit System (Security Information and Event Management), Security Policy Setting
Environmental Specifications	
Operating Environment	Temperature: 10 to 30°C Humidity: 20 to 80% RH (Relative Humidity)
Power Requirements	C1333F: 110V-127V 60Hz 6.6A C1333P: 110V-127V 60Hz 6.8A
Power Consumption	C1333F: Maximum: Approx. 1610 W or less Standby: Approx. 24.0 W¹¹ Sleep Mode: Approx. 1.0 W¹² Typical Electricity Consumption (TEC) rating: 0.34 kWh¹³ C1333P: Maximum: Approx. 1610 W or less Standby: Approx. 24.0 W¹¹ Sleep mode: Approx. 1.0 W¹² Typical Electricity Consumption (TEC) rating: 0.33 kWh¹⁴
Environmental Standards	ENERGY STAR® certified EPEAT Silver
Consumables	
Toner Cartridges¹⁵ (All in One Toner Cartridge)	Toner T12 Yellow Toner T12 Magenta Toner T12 Cyan Toner T12 Black
Toner Yield (Estimated @8.5% Coverage)	Yellow/Magenta/Cyan: 5,300 impressions Black: 7,400 impressions

Paper Source Options	
Feeder Options	PAPER FEEDER PF-K1 Paper Capacity: 550 Sheets [20 lb. bond (75 gsm)] Paper Type: Thin, Plain, Thick, Color, Recycled, Coated, Pre-punched, Letterhead, PostCard, Paper Size: Letter, Legal, Statement, Executive, Government Letter, Government Legal, Custom Size: 4" x 5-7/8" to 8-1/2" x 14" Paper Weight: 16 lb. Bond to 74 lb. Cover (60 to 200 gsm) Power Source: From the Main Unit Dimensions (W x D x H): 16-1/2" x 16-7/8" x 6-1/8" Weight: Approx. 10.1 lb. (4.6kg)
Accessories	
Card Readers¹⁶	MiCARD Attachment Kit-B1¹⁷ Copy Card Reader-F¹⁷ Copy Card Reader Attachment-J¹⁷
Data Security⁶	Send PDF Security Feature Set-E1
Barcode Printing	Barcode Print Kit-E1 Provides the ability to print 1D and 2D barcodes on output

¹ Time from device power-on, until print ready (not print reservation).

² Including consumables.

³ Print speed is based on internal testing. Print speed may vary, depending on the number of copies selected as well as the settings for size, type, and orientation of paper.

⁴ Subscription to a third-party cloud service required. Subject to third-party cloud service provider's Terms and Conditions.

⁵ Optional Barcode Printing Kit-E1 is required.

⁶ Only Applies to imageFORCE C1333F model.

⁷ Single page only.

⁸ Requires optional uniFLOW Online/uniFLOW.

⁹ Requires optional PDF SECURITY-E1.

¹⁰ This feature is off by default and must be turned on by the administrator. Warm-up times are affected once turned on.

¹¹ Reference value: measured one unit.

¹² Sleep mode is not available in all circumstances due to certain settings.

¹³ ENERGY STAR Product Specification for Imaging Equipment Version 3.2.

¹⁴ ENERGY STAR Product Specification for Imaging Equipment Version 3.0.

¹⁵ Includes toner, drum, developer, and waste toner hopper.

¹⁶ Attachment kit required.

¹⁷ Ask Canon authorized representative for reader compatibility information.



usa.canon.com/business



As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified this model as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Canon, imageFORCE and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. Canon products offer certain security features, yet many variables can impact the security of your devices and data. Canon does not warrant that use of its features will prevent security issues. Some security features may impact functionality/performance; you may want to test these settings in your environment. Nothing herein should be construed as legal or regulatory advice concerning applicable laws; customers must have their own qualified counsel determine the feasibility of a solution as it relates to regulatory and statutory compliance. Trellix and the Trellix logo are trademarks or registered trademarks of Musarubra US LLC or its subsidiaries in the U.S. and other countries. All other referenced product names and marks are trademarks of their respective owners. All printer output images are simulated. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Representative for details. Products shown with optional accessories. Subscription to a third-party cloud service required. Subject to third-party cloud service providers terms and conditions. uniFLOW is a registered trademark of NT-ware Systemprogrammierung GmbH. Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21, or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors.

©2025 Canon U.S.A., Inc. All rights reserved.

09/25-2428-13873